

التاريخ : 19/02/2023 م

إعادة طرح عطاء رقم - RFQ-H-11562

السادة / الشركات المختصة الراغبة بالمشاركة بالعطاء - المخترين .

الموضوع : TRADE IN Fluoscopy ، حسب المواصفات المرفقة .

بالإشارة إلى الموضوع أعلاه، يرجى الإطلاع على جداول المواصفات المرفقة مع مراعاة الشروط التالية :-

1. تكتب الأسعار بالشيكل الإسرائيلي وبشكل واضح في المكان المخصص حسب الجدول المرفق وتشمل قيمة الضريبة المضافة، في حال وجود تعارض بين سعر الوحدة ومجموع سعر الوحدة المثبتة، فإن سعر الوحدة هو الذي سيعتمد .
2. ثمن نسخة العطاء (750) شيكل إسرائيلي غير مسترد تدفع في الدائرة المالية مبني الإدارة - الطابق الأول .
3. كفالة دخول عطاء بقيمة (3000) ثلاثة آلاف دولار أمريكي أو ما يعادلها سارية المفعول لمدة ثلاثة شهور تأميناً نقدياً أو كفالة بنكية أو شيكًا مصدقاً وفي حالة عدم تقديم التأمين لainظر في عرض سعركم .
4. كفالة حسن تنفيذ بقيمة 10% من قيمة العطاء في حالة الترسية تأميناً نقدياً أو كفالة بنكية او شيكًا مصدقاً سارية المفعول لمدة ثلاثة أشهر .
5. رسوم الإعلان على من يرسو عليه العطاء .
6. ضرورة الالتزام بالتسهير على النحوذج المرفق بالعطاء .
7. ضرورة أن تكون الأجهزة المقدمة جديدة وليس مجددة .
8. يتم تقديم شهادة خصم مصدر في حالة تجاوز المبلغ قيمة 2500 شيكل أو ما يعادلها .
9. غرامة تأخير 6% عن كل أسبوع وتبأداً من اليوم الذي يلي موعد التسليم المحدد من قبلكم، وفي حال تأخير التوريد مدة تزيد عن أسبوعين يحق للمستشفى إلغاء أمر الشراء والاحالة على مورد آخر وتحمليكم فرroc الأسعار .
10. الدفع خلال 90 يوماً من تاريخ الاستلام والفحص ومتابعة المواصفات الفنية المطلوبة .
11. تحديد فترة التسليم في عرض سعركم وايضاً فترة الضمان وأن تكون صلاحية العرض المقدم من طرفكم مدة لا تقل عن ثلاثة أشهر .
12. تسلم عروض الأسعار في مكتب مدير دائرة اللوازم والمشتريات رقم ( 6400 ) مبني الإدارة في مستشفى النجاح الوطني الجامعي **بالظرف المختوم فقط** وتوضع في صندوق العطاءات ، على أن يكون عرض السعر يحوي فصلاً بين العرض المالي والعرض الفني أي أن العرض المالي منفصل عن العرض الفني مع ضرورة كتابة رقم العطاء على المغلفين وتوضيح أي منها العرض الفني والعرض المالي .
13. ضرورة تحديد تكلفة عقد الصيانة السنوية للسنة التي تلي السنة الأولى المجانية ولمدة 5 سنوات .
14. على كل من يرغب بالمشاركة بتقديم عرض سعر تقديم ما لديه من مواد او اجهزة او ماركات لما جاء اعلاه او البديل له والرد على العطاء سلباً او ايجاباً .
15. يحق للمستشفى إلغاء العطاء دون ابداء السبب ودون تحمل اية تكاليف مع إعادة رسوم نسخة العطاء للمشاركين في العطاء ان وجدت، ولا تتحمل المستشفى تكاليف النقل والتحميل والتغذيل .
16. ضرورة ارفاق الرخصة التجارية والسيرة الذاتية للشركة مع عرض السعر .
17. اخر موعد لتقديم عرض السعر هو يوم الأحد الموافق 26-02-2023م الساعة الثالثة مساءاً PM 03:00 .
18. لایة استفسارات متعلقة بالعطاء المذكور اعلاه، يرجى الاتصال بالسيد مدير دائرة اللوازم والمشتريات هاتف رقم (+97092389687) داخلي ( 6400 ) أو من خلال البريد الالكتروني tender3@najah.edu .

مدير دائرة اللوازم والمشتريات  
إياد المكاوي

إعادة طرح عطاء رقم – RFQ-H-11562

جدول الأسعار والكميات :

No	NNUH Code	Item	QTY	Unit	CODE #	وزيل / وزع	مدة التوريد	U.P (NIS)	T.P (NIS)
1	G-A-MDD00080	<b>Fluoroscopy</b> حسب المواصفات الفنية المدرجة بجدول المواصفات	1	Pcs					
2	G-A-MDD00080	<b>القيمة الاستبدالية للجهاز القديم</b> <b>Trade in Fluroscopy shimadzu</b>	1	Pcs	D150Bc-40	—	—		
-	Total Price (NIS)								


ملاحظة : البند الأول يشمل سعر الجهاز الجديد والبند الثاني يشمل القيمة الاستبدالية للجهاز القديم .

يرجى الالتزام بتبني الجدول التالي :

1	اسم الشركة
2	الختم
3	التوقيع والاسم
4	معلومات الاتصال
5	مدة التوريد
6	مدة الكفالة إن وجدت

المواصفات الفنية :

Fluoroscopy machine, Qty: 1	Compliance	Deviation
Good brand name with FDA or CE (Europe, USA, Japan)		
Trade in Fluoroscopy / shimadzu / Model: D150Bc-40		
Should has CB test and EMC test (60601.1 and 60601.2)		
Manufacturer:		
Source and origin:		
Model:		
<b>Fluoroscopy machine Specification:</b>		
State of the art technology and the latest version from the manufacturer and the latest and best technology on the market		
<b>Height adjustable Table &amp; Tube stand</b>		
Maximum patient weight without movement > 250 Kg		
Footrest weight capacity >250 Kg		
Table height less than 65 cm - up to 100 cm		
Table movements controls : elevation , transversal , longitudinal		
Elevation range more than 55 cm		
Motorized Tilt angle -90 degree to +90 degree		
Automatic stop in horizontal position		
Material carbon fiber		
Table top to detector distance ( please specifie )		
X-ray attenuation ( Please specifie )		
Tilt speed ( please specifie )		
Elevation speed ( please specifie )		
Table auto positioning mode		
Automatic grid selection		
Table integrated Keyboard include : Table movements control / X-ray tube assembly movment control / X-ray collimator beam control / Emergency push stop		
Tube column angulation Motorized range $\pm 40^\circ$		
Tube column automatic centering of target organ during oblique projections in fluoroscopy		
Variable SID:100 to 180 cm		
Patient coverage not less than 190 cm		
Foot switch for releasing fluoroscopy and acquisition.		

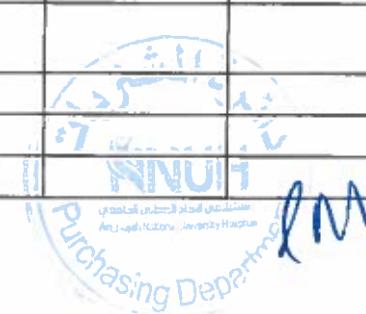

<b>Compressor</b>		
Motorized compressor , remote controlled with safety system ( please specifie )		
Useful distance between compressor and tabletop ( Please specifie)		
Removable compression cone		
<b>X-ray Tube</b>		
Motorized movements		
Tube rotation, 90°/180°.		
Multi stop postions including 0°and 180°		
Dual focus rotating anode tube with compound anode		
Integrated overpressure safety device in the tube protective housing		
High heat storage capacity and high thermal load capacity for small focal spots		
Compatable with pulsed fluoroscopy		
Compatable with grid controlled fluoroscopy		
Automatic filters		
Real time dose adjustment		
Collimation on last image hold		
The device should measure cumulative x-ray dose for safety issue		
<b>Collimator</b>		
Automatic and manual collimation		
Touch screen collimator display		
LED lamp for source light		
<b>Table Fixed Detector</b>		
Digital flat detector 43x43 cm ( 17" x 17" )		
Pixel pitch not less than 148 µm		
Matrix size not less than 2840 x 2870 pixel		
Continuous fluoroscopy up to 30 fps		
Pulsed fluoroscopy from 15 - 30 fps		
<b>Generator</b>		
Automatic & Manual KV and mA set values		
Automatic Exposure control		
Power 80KW		
Over load protection feature		
Digital display		

<b>Image display system &amp; storage</b>		
Three high quality full HD color touchscreen monitors , two with touchscreen function in x-ray room (ceiling suspended with longitudinal movement), the third dedicated to mouse and keyboard in control room		
Monitors size : not less than 21"		
Matrix : 2 Megapixel or higher		
DICOM (high version) ready for connectivity to any network, computer/PC etc. in DICOM format.		
The image system should be integrable to PACS system		
The computer should have high speed heavy duty processor not less than intel Core i7		
Computer local storage (SSD) not less than 1TB		
Table control console (in control room)		
Portable control console in (X-ray room)		
Intercom system to communicate with patients.		
<b>Ceiling suspended X-ray tube head</b>		
10" Full color touchscreen display		
Telescopic column with motorized vertical travel		
Longitudinal travel		
Motorized automatic collimation		
LED light field indicator		
<b>Fixed vertical stand wall Bucky wall stand</b>		
Motorized and manual vertical movement of detector		
Fixed Detector 43 X 43 cm, same as table detector		
Motorized Tilting movement of detector		
With emergency stop bottom		
<b>Portable LEAD wall parier collapsable, Qty: 1</b>		
<b>Accessories (aprons adult), Qty: 5</b>		
<b>Protection Glasses, Qty: 2</b>		
<b>Thyroid shield, Qty: 5</b>		
<b>Training included in the price:</b>		
Operation training for one doctor and one tech abroad		
Service training for one hospital engineer at manufacturer site and must be real service training		

<b>Applications</b>		
Gastroenterology		
Skeletal		
Thorax and lungs		
Pediatrics		
Urology and gynecology		
Traumatology		
<b>Optional to be priced separately:</b>		
1- Portable wireless detector 43x43 cm with two batteries and charger, weight capacity: 250 kg		
List price all accessories necessary to operate the solution as per the required specs listed above		
List all other accessories and supplies that you may recommend to NNUH and are considered optional items to be decided on purchasing at the discretion of NNUH		
Complete with all accessories and consumables needed to work completely as specified		

<b>Your offer should contain the following:</b>		
1) Preventive maintenance schedule		
2) Reference list for the same model, the supplier must have 3 reference at least on local market or regional, and must prepare site visit for our team to evaluate the product.		
3) Compliance sheet		
4) Catalogues		
5) Data sheet		
6) Authorization letter		
7) CE or FDA and ISO certificates		
8) CB test and EMC test certificate		
9) The service and operational manuals must delivered as soft copy with the units		
10) Guarantee for 10 years for spare parts supply		

<b>Warranty: 5 years, including the software upgrade, with commitment to conduct preventive maintenance (labor and parts) during the warranty period and according to manufacturer recommendations, including all parts, tube and and all equipments included in the tender.</b>		
--	--	--

<b>Site preperation, ( Site visit is mandatory )</b>		
Removing existing rubber floor and rehabilitation of its underlay using mechanical polishing tool so as to get the surface as smooth as possible. Complete.		
Supply and install 3 mm thick european made PVC sheets , seamless joints, fixed on the existing polished floor with approved adhesive, including compatible self leveling materials, cutting , fixing, adhesive, sealant, dampproof membrane and primers all as manufacturer's instructions. The price also includes skirting 10 cm high (Rolca) or equal approved.		
Supply and install hygenic wall cladding system, "Altro White Rock" for the interior walls of Fluoroscopy room ,including all accessories , bending walls as recommended for internal and external corners, cutting, special adhesive, complete. ( the contractor shall use the same material for the internal side of the wooden doors that he will supply for the floroscopy room).		
Supply install new european made false ceiling and gypsum ceiling tiles with a tin layer and a mold-resistant face, with a thickness not less than 10 mm, size 60 x 60 cm the price is to include Dismantling of the existing false ceiling in the floroscopy room area , the contractor shall move surplus materials outside the hospital. The contractor also shall make needed arrangements with the electrical and mechanical engineers to deal with the ceiling electromechanical hangings, complete.		
Supply install a new leaded glass window with wooden oak frame , leaded wooden door for the control room , new leaded wooden door with Red warning light above the door for the fluoro room and new wooden leaded door for bathroom . All wooden works is to be made by oak veneers and oak solid wood where needed , and must have an exellant finsh as per hospital engineer instructions .		
Removing existing trunk and change it to 1 or 2 PVC pipes 4" as needed . The price is to include fixing the pipes with concerte and tiling above them before appling the self leveling material on the floor . The price is to include electrical water proof floor boxes as needed , and all the accessories needed , complete.		
Supply install new air conditioning unit the cooling capacity must be suitable with the heat dissipation from the devices and as the manufacture Recommendations		
Supply, install, test and connect Lighting fixtures ,LED /6500k /4000 lm( Osram or Philips only QTY. 12 ) 60 x 60 cm with dimmer switch		
Build up new concrete base for the table and wall bucky as per manufacturer instructions, using any steel reinforcement bars if needed as per engineer instructions, complete.		
Al Najah university Hospital Logo in glass should be at middle of the wall		



## إعادة طرح عطاء مدفوع

يعلن مستشفى النجاح الوطني الجامعي عن إعادة طرح عطاء رقم RFQ-H-11562 والخاص بـ **Trade in Fluoroscopy** ، على الشركات المختصة والراغبة بالمشاركة بالعطاء تقديم عروض اسعارها في موعد اقصاه يوم الأحد الموافق 26/02/2023 الساعة الثالثة عصرأً : PM 03:00

وقت الإغلاق الساعة	التاريخ	موعد الطرح	ثمن نسخة العطاء	موضوع العطاء	رقم العطاء	#
P.M 03:00	2023/02/26	2023/02/19	٧٥٠ شيكلا غير مسورة	Trade in Fluoroscopy	RFQ-H-11562	1

### حسب الشروط التالية:

1. ضرورة ارفاق الرخصة التجارية والسيارة الذاتية للشركة مع عرض السعر .
2. رسوم الإعلان على من يرسو عليه العطاء .
3. ثمن نسخة العطاء ٧٥٠ شيكلا غير مسورة .
4. كاتنة دخول عطاء بقيمة (30000) ثلاثة الآف دولار أمريكي .

على الراغبين بالحصول على نسخة العطاء مراجعة دائرة اللوازم والمشتريات مكتب رقم 6400 / مني الإداري أو عبر البريد [Tender3@najah.edu](mailto:Tender3@najah.edu) ونذاك خلال ساعات الدوام الرسمية .

للاستفسارات أخرى يرجى مراجعة دائرة اللوازم والمشتريات هاتف رقم 970-09-2331471 + 6400 / فاكس: 6400 + 970-9-2389685 .